



Carboactiv Pocket Duosorb Select

Product Range

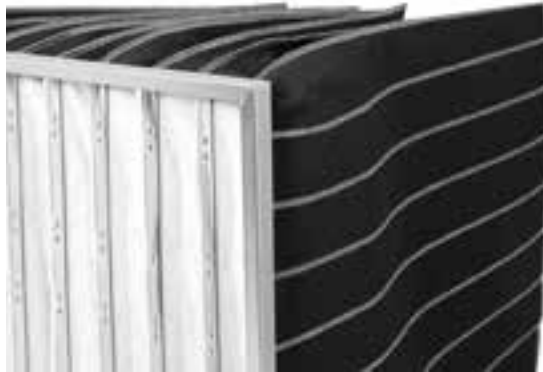

Features



Applications



Filter Class

F

ePM1

KEY FACTS

- Particle filtration and gas adsorption in one filter element
- Improvement of indoor air quality
- Ideal for eliminating odors
- Low pressure drop

DESIGN

Multi-layered media, tailored-sewn into pockets with sealed, conical spacer seams for an optimal V-shape. A galvanized steel frame provides rigidity.

APPLICATIONS

For use in public buildings or other places where people gather to improve indoor air quality and protect against sick building syndrome.



Carboactiv Pocket

Duosorb Select

PERFORMANCE DATA

Article No.	Filter Class		Dimensions	Pockets	Flow Rate	Pressure Drop	Energy Consumption	Energy Class
	EN 779	ISO 16890						
800657029876	F7	ePM2.5 65%	287 x 592 x 600	4	1650	120		D
800657029871	F7	ePM2.5 65%	287 x 592 x 600	5	1650	120		D
800657029879	F7	ePM2.5 65%	287 x 892 x 600	4	2475	120		D
800657029874	F7	ePM2.5 65%	287 x 892 x 600	5	2475	120		D
800657029867	F7	ePM2.5 65%	490 x 592 x 600	6	2825	120		D
800657029870	F7	ePM2.5 65%	490 x 592 x 600	8	2825	120		D
800657029877	F7	ePM2.5 65%	592 x 287 x 600	8	1650	120		D
800657029872	F7	ePM2.5 65%	592 x 287 x 600	10	1650	120		D
800657029878	F7	ePM2.5 65%	592 x 490 x 600	8	2825	120		D
800657029873	F7	ePM2.5 65%	592 x 490 x 600	10	2825	120		D
800657029866	F7	ePM2.5 65%	592 x 592 x 600	8	3400	120	1801	D
800657029865	F7	ePM2.5 65%	592 x 592 x 600	10	3400	120	1507	D
800657029880	F7	ePM2.5 65%	592 x 892 x 600	8	5125	120		D
800657029875	F7	ePM2.5 65%	592 x 892 x 600	10	5100	120		D

SPECIFICATION

Heat resistance	< 30 °C (Peak 50 °C)	Moisture resistance	< 60 % (Max. < 90 %)
Regenerable	No	Incinerable	No

OPTIONS

Gasket	Flat gasket, 1 or 2 sides
--------	---------------------------