


Filtration class:	ISO 16890 ePM10 60 % and coarse G4 and M5 (EN779: 2012)
Material:	Synthetic with Bi-co fibers blended with solid PET fibers
Material thickness:	2,5 mm
Media:	G4—Pleated M5—Minipleated
Frame:	ABS plastic
Temperature:	max. + 80 °C



Size	Depth
Available in any size!	48 mm
	96 mm
	150 mm

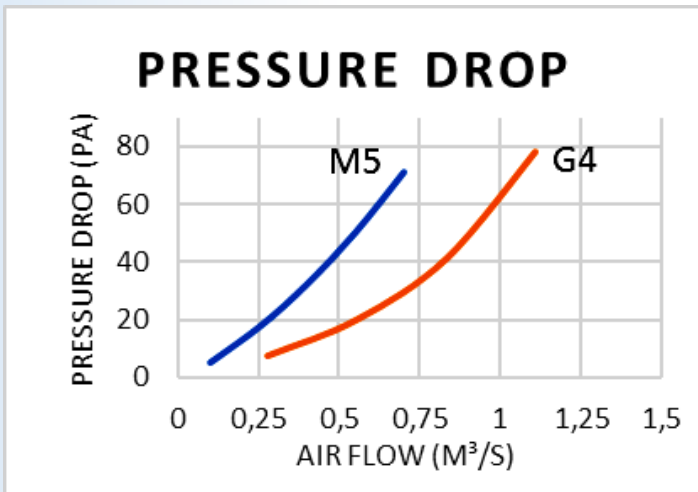

- Rigid frame
- High dust holding capacity
- Moisture resistant to 100 %
- Easily disposable
- G4: coarse filter—design for pre-filtration
- M5: medium class filtration used as pre-filter or final filtration

The material does not cause allergies, skin irritation or respiration problems. It does not mould, is free from odour and does not emit gas or emission.